


LEXGARD® MP1000

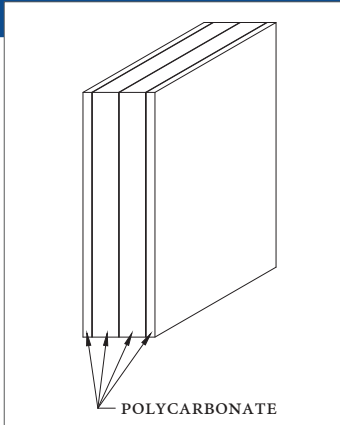

Innovative glazing solutions for forced entry protection

PRODUCT DESCRIPTION

LEXGARD® MP1000 LAMINATED POLYCARBONATE GLAZING HAS BEEN TESTED TO FORCED ENTRY PERFORMANCE STANDARDS BELOW.

TECHNICAL DATA

- Nominal Thickness: 1"
- Tolerance: .930" / 1.130"
- Weight: 6.41 lbs per SF
- Available Sizes: Up to 72" x 96", 12" x 12" Minimum for UL Ballistic Rating
- Light Transmittance: 65%
- U-Value: .68
- SHGC: .88
- Shading Coefficient: .91
- Available in bronze, gray, and green tint

APPLICABLE STANDARDS

- ANSI Z97.1
- CPSC 16 CFR 1201 (Category I and II)
- ASTM C 1036
- ASTM C 1172

PERFORMANCE

- Forced Entry: ASTM F1 233 Class V, HP White Level IV - TP-0500.02
- Ballistic: UL 752 – Level 2 – UL Listed BP844, .357 Magnum Jacketed Lead Soft Point, No Spall, No Penetration

CONSTRUCTION

This product is laminated polycarbonate and contains exposed polycarbonate surfaces with abrasion resistant coatings on both sides

INSTALLATION

When used for ballistic protection, glazing should be installed in a UL Level 2 Bullet Resistant frame system. Holes must be covered with a UL listed device. All glass should be installed in accordance with the guidelines set forth in the current edition of the Glass Association of North America (GANA) Glazing and Sealant Manuals. Glazing systems should incorporate a weep system to allow moisture and water to escape the glazing channel.

- Face Clearance: 1/8" per side
- Edge Clearance: 1/4"
- Bite Clearance: 1"

MAINTENANCE

LEXGARD® is a laminated polycarbonate makeup which includes exposed polycarbonate (plastic) on both interior and exterior surfaces of the makeup. It is **very important** to follow maintenance and cleaning instructions closely. To ensure the polycarbonate is not damaged, only approved cleaners and cleaning methods should be used. For complete maintenance and cleaning instructions, please contact Insulgard Security Products.